



PICKLE TOP

PRO-CUSHION SURFACE

Product Description and Benefits:

Pickletop is a specialized coating system designed for use on pickleball court surfaces. The neutral-based coating is designed to be tinted with high UV Pigment Dispersion, resulting in 17 standard color choices. Pickletop is factory-textured to provide a safe, non-slip surface with a non-aggressive texture to minimize ball wear

**OFFICIAL
SURFACE OF**

ACRYTOP™
ACRYLIC SURFACE

USES

Pickletop is a specialized sport surface coating, High cushion sports surface for Pickelball.

COLOR

Neutral. Desired color is achieved by mixing High UV protect pigment dispersion with Pickletop

PRODUCT DATA

Type	Acrylic
Odor	Slight Ammonia
Flammability	Non-Flammable
Flash Point	None

SURFACE PREPARATION

Pavement surface must be cleaned entirely of dust, dirt, and debris. Repair of pavement surface defects, depressions and cracks must be completed prior to application. All repairs must be flush and smooth to adjoining surfaces. New asphalt surfaces must cure 14-30 days prior to application. It is recommended that any uncoated asphalt surface receives one or more coats of Acrytop Acrylic Resurfacer as required by surface roughness and porosity to provide a smooth, dense underlayment for application of color coatings. New concrete surfaces must cure 28 days prior to application. Concrete surfaces should have a medium broom finish or similar roughened texture. Concrete or asphalt surface should be proper water drainage slope.

MIXING PROCEDURES (ITF class-1 slow)

SR NO	PRODUCTS	NUMBER OF LAYERS	CONSUMPTION/SQ M
1.	ACRYTOP primer coating	1	Primer 0.120kg/sqm
2.	ACRYTOP Resurfacer coating	2	Resurfacer: 0.600kg/sq m Silica sand (30-60mesh): 1.00kg/sq m Water: 0.372 ltr/ Sq m
3.	ACRYTOP Pro Cushion- 2	5	Cushion: 2.00 kg / Sq m Water: 0.600 ltr/Sq m
4.	ACRYTOP Pro Cushion- 1	2	Cushion: 0.600 kg / Sq m Water: 0.240 ltr/Sq m
5.	ACRYTOP Top color	2	Topcolor : 0.600kg/sq m Silica sand (70-90mesh): 0.540 kg/sq m

NOTE: Mix thoroughly to ensure complete dispersion of Color.

APPLICATION

Apply mixed coating with a soft rubber squeegee. A minimum of two coats are recommended.

IMPORTANT

Surface and air temperatures must be above 50°F (10°C) during application and for at least 24 hours after application. Stir before using. Do not apply when rain is imminent or forecast. Keep from freezing. Close container when not in use.

DRYING TIME

Pickletop dries in 30 to 60 minutes under optimum drying conditions. Allow each coat of material to dry thoroughly before applying successive coats. Low ambient or low surface temperature and high humidity increase drying time. Allow coating to cure for 48 hours before opening up for play.


CAUTIONS

Do not store in direct sunlight or where temperatures exceed 100°F. Do not apply if rain is imminent or forecast. Keep from freezing. Close container when not in use. Refer to product Safety Data Sheet (SDS) for additional safety information and precautions.

WARRANTY

The statements made on this technical bulletin are believed to be true and accurate, and are intended to provide a guide for approved construction practices. Manufacturer does not make, nor does it authorize any agent or representative to make any warranty, express or implied, concerning this material as workmanship, weather, construction, equipment utilized and other variables affecting results are all beyond our control. Manufacturer warranty only that the material conforms to product specifications and any liability to the buyer or user of this product is limited to the replacement value of the product only. In no event shall Manufacturer be liable for any injury, loss or damage, either direct or incidental, special or consequential, however arising, in connection with material or equipment furnished or work performed. Manufacturer shall not, in any manner, be liable for any defects, variations or change in condition in the substructure over which its products are installed.

PRO CUSHION PICKELBALL COLORS CHART

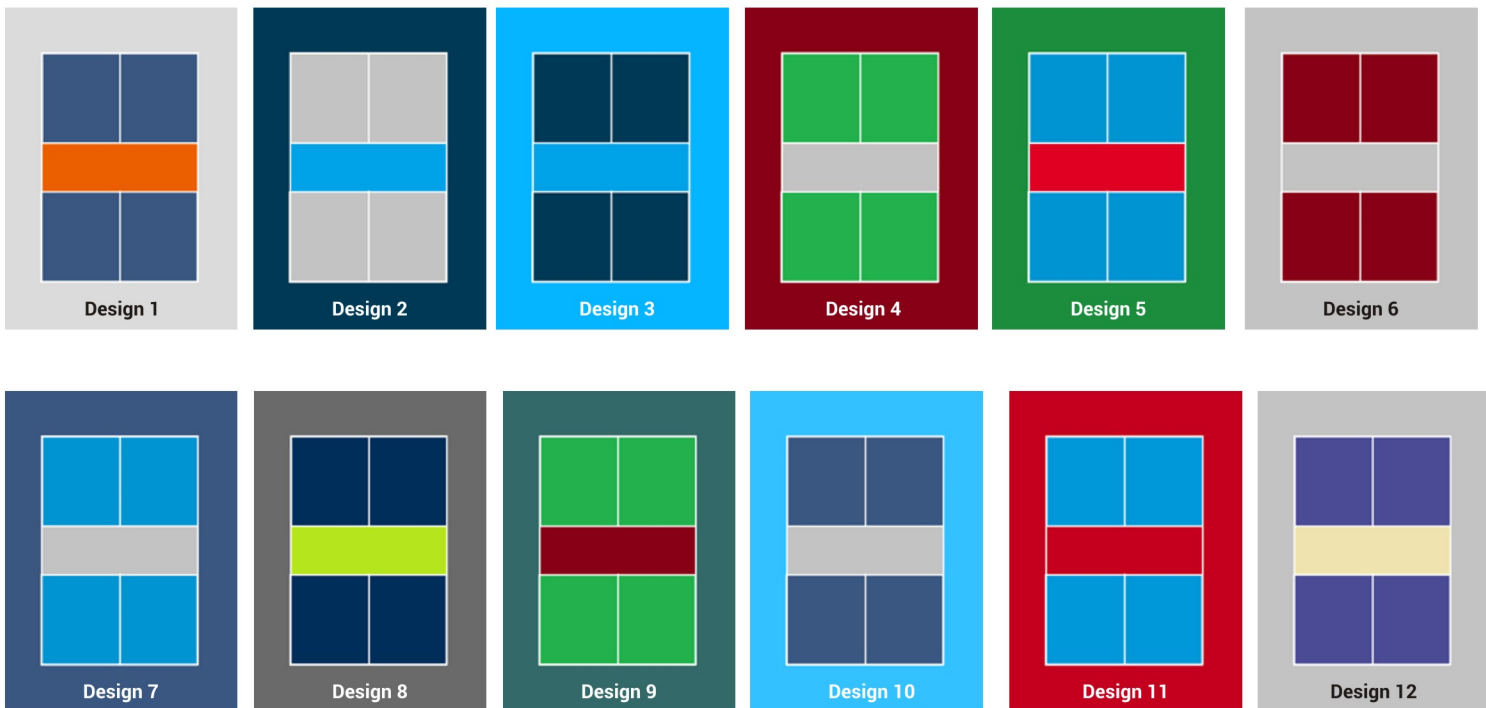

Contact Info

TOPFLOOR SPORTS INFRA PVT LTD.

Corporate office : 1220, Shivalik Satyamev, Nr.Vakil Bridge, Ambli Bopal Cross Road, Bopal, Ahmedabad-380058, Gujrat INDIA

Factory : Survey no 199 At : Vaghroda, Nr. Khavad village kadi-kalyanpura road, Ta: kadi Dist: Mahesana 384445.

International office :Australia office: Unit 402/91A grima street, schofields 2762, Sydney



+91-9978631811

+91-8200513097



info@topfloorsportsinfra.com

