



MULTIPURPOSE PP TILE

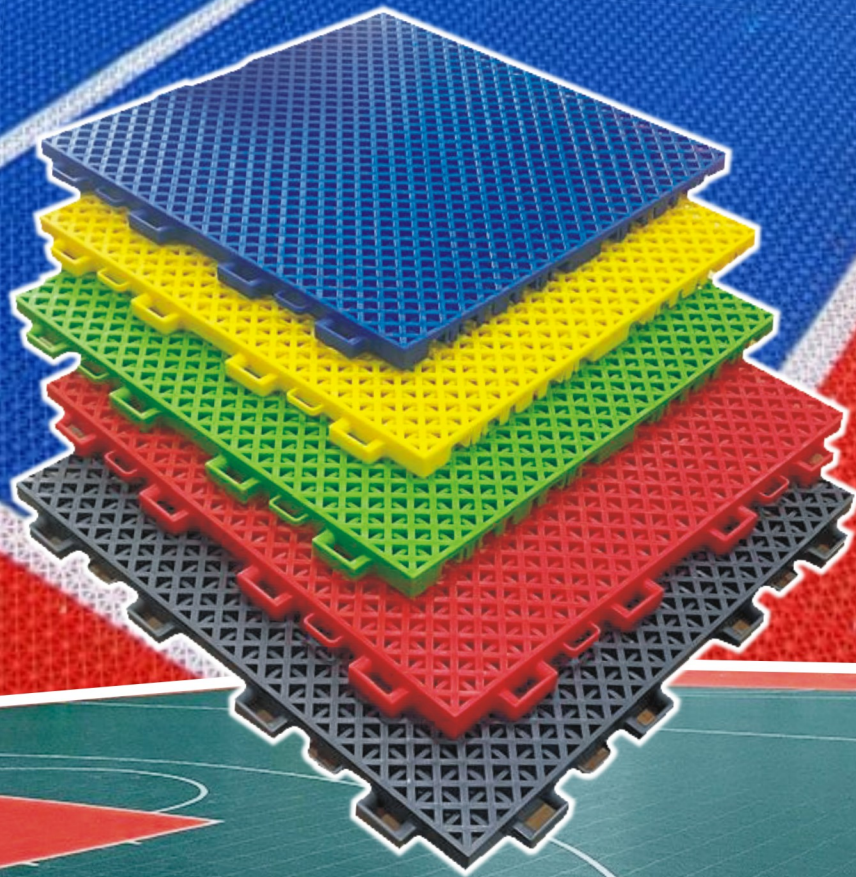

A key of Success

- Ease of Installation
- Easy to Maintain
- Durability

MULTIFUNCTION PP TILES

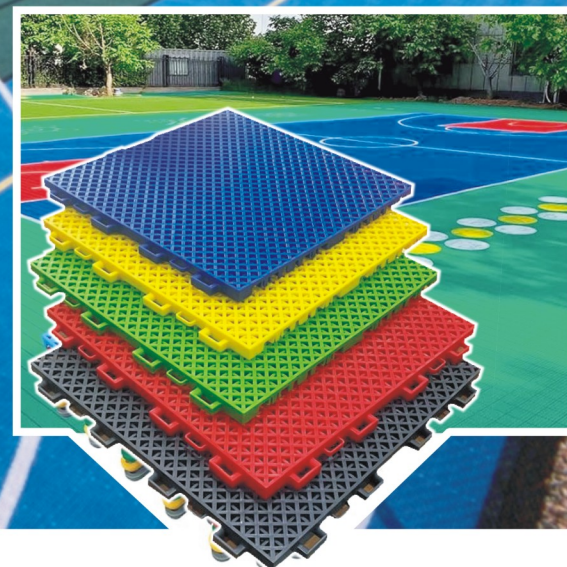

TOPFLOOR SPORTS INFRA PP interlocking Tiles

PP interlocking Tiles are made from high-quality PP (Polypropylene) material. These interlocking tiles are connected using a unique locking mechanism, making them easy to install and remove. The tiles lock tightly to form a solid surface without the need for adhesives.

PP interlocking flooring can be used as a surface for basketball courts, tennis courts, aerobics courts, handball courts, volleyball courts, badminton courts, roller skating rinks, children's playgrounds, and various other sports courts.

PP Interlocking Flooring Advantages



Ease of installation :

The tiles can be laid directly over existing flooring, without the need for adhesives or special tools. This not only saves time and money but also makes it easy to replace individual tiles if they become damaged or worn.



Durability :

They can withstand heavy loads and are resistant to scratches and abrasions, making them ideal for industrial and commercial applications. They are also slip-resistant, which helps to prevent accidents and injuries in high-traffic areas.



Easy to Maintain :

They are resistant to most chemicals and can be cleaned with a mild detergent and Water. The tiles are also resistant to mold and mildew, making them an excellent choice for damp or humid environments.



Application :

PP patchwork floor can be used as basketball court, tennis court, squash court, aerobics field, futsal field, handball court, volleyball court, badminton court, roller skating field, roller hockey field, badminton court, gym, etc. Surface. Other sports fields.




Available Design :

In a range of colors and patterns, including solid colors, speckled designs, and wood grain patterns. This makes it easy to create a customized look that complements the overall design of the space.





Main material :

Eco-friendly virgin polypropylene; 100% recyclable, no smell, no heavy metals; waterproof; UV resistant.

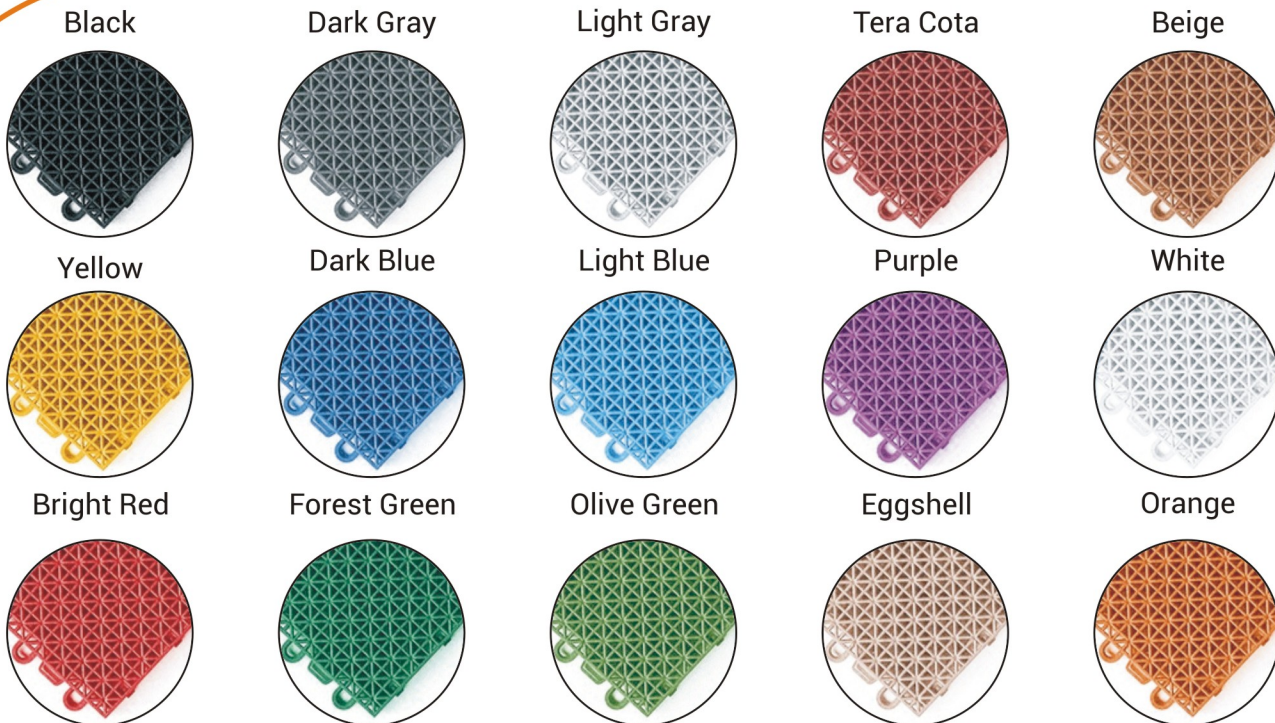

Specifications of PP Interlocking Tiles	
Material	PP (Modified Propylene Polymer)
Load capacity	35 ton
Size	304.8*304.8*15mm
Weight	380 gm
Temperature Endurance	-40? to 80?
Rebound Rate	0.95
Warranty	10-12 year

Typical fields of application of **TOPFLOOR**
PP interlocking Tiles

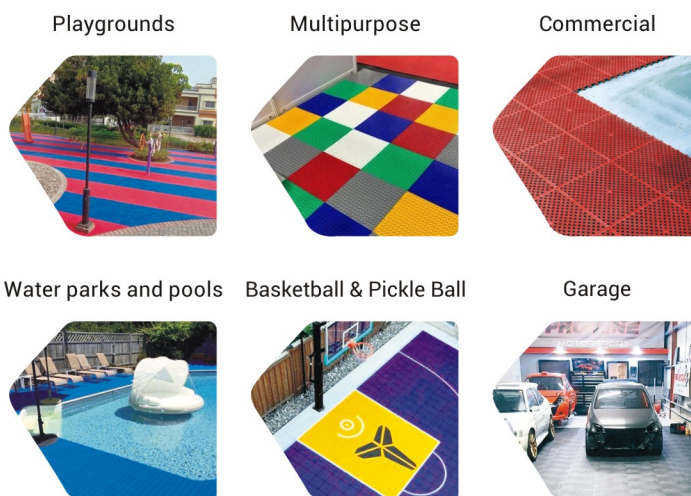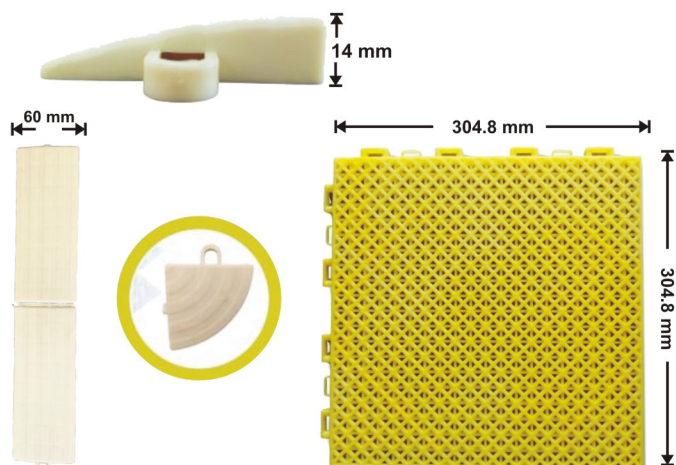

Our worldwide Distribution Network



वसुधैव कुटुम्बकम्



TOPFLOOR SPORTS INFRA PVT. LTD.

India office

Corporate office : 1102, Swati Trinity , Nr. Applewood, Shantipura Circle, Shela, Ahmedabad-380057 Gujrat INDIA

Factory Office : Survey no 199 At : vaghroda,Nr. Khavad village kadi-kalyanpura road,Ta: kadi Dist: Mahesana 384445

Mo. : +91-9978631811, +918200513097, **e-mail :** info@topfloorsportsinfra.com, **web :** www.topfloorsportsinfra.com

International office

Australia office: Unit 402/91A grima street, schofields 2762, Sydney